



SKYTEC Smart EV charger (Lite Version) - RFID mode

JNT-EVC11 Series




- Stylish durable design
- Top quality PC, Anti-UV treatment, Automotive coating
- IK08 & IP54 for indoor & outdoor use
- Switchable from 32A to 16A
- RFID Card reader
- LED indicator
- LAN standard, Wi-Fi optional
- OCPP 1.6J optional
- IEC 62196-2, Type 2 Socket



Socket Version



Installation

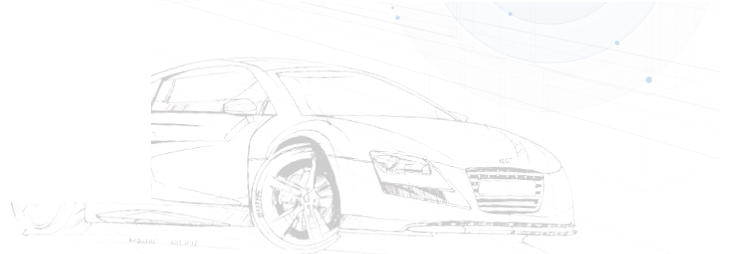

Mode 3 AC EV Charger

Model No.	JNT-EVC11/AC07		
Input Voltage	230Vac±10% (Single phase)		
Frequency	50-60Hz		
Amperage	32A		
Max. Power Output	7kW		
Function			
User Authentication	RFID (ISO 14443)		
Network	LAN Standard (Wi-Fi Optional with Surcharge)		
Connectivity	Optional OCPP 1.6 J		
Protection & Standard			
Certificate	CE (TUV)		
Charging Interface	IEC 62196-2, Type 2 Socket or Plug (T2S Socket Optional)		
Safety Compliance	IEC 61851-1, IEC 61851-21-2		
Multiple Protection	UVP, OVP, RCD (DC 6mA), SPD, Ground Fault Protection OCP, OTP, Control Pilot Fault Protection		
Environmental			
Operating Temperature	-30°C to 50°C		
Indoor / Outdoor	IK08 & IP54		
Relative Humidity	Up to 95% Non-condensing		
Cable Length	Socket Type		
Dimensions & Weights			
Product Dimensions	361.5 x 250 x 100mm		
Package Dimensions	497 x 348 x 242mm		
Net Weight	4.6kg / 3.2kg		
Gross Weight	5.5kg / 4.2kg		
Pedestal			
Dimensions	JNT-SP 270x155x1395mm		
Net Weight	13kg		
Gross Weight	17kg		
Product Material	Powder Coated Steel		