




JNT-EVC11 Series



- Stylish durable design
- Top quality PC, Anti-UV treatment, Automotive coating
- IK08 & IP54 for indoor & outdoor use
- Switchable from 32A to 16A
- RFID Card reader optional
- LED indicator
- LAN standard, Wi-Fi optional
- OCPP 1.6J optional
- IEC 62196-2, Type 2 Socket or Plug with 5m cable (T2S Socket optional)



Socket Version

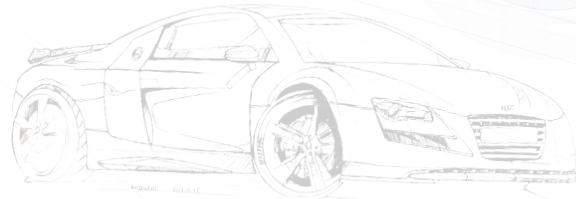

Installation



Wall-mounted



Single pedestal



Back-to-back pedestal



Back-to-back pedestal with cable management system



Dual side-to-side cable management system



Model No.	JNT-EVC11/AC07	JNT-EVC11/AC11	JNT-EVC11/AC22	
Input Voltage	230Vac±10% (Single phase)	400Vac±10% (Three Phase)		
Frequency	50-60Hz			
Amperage	32A	16A	32A	
Max. Power Output	7kW	11kW	22kW	
Function				
User Authentication	Optional RFID (ISO 14443)			
Network	LAN Standard (Wi-Fi Optional with Surcharge)			
Connectivity	Optional OCPP 1.6 J			
Protection & Standard				
Certificate	CE (TUV)			
Charging Interface	IEC 62196-2, Type 2 Socket or Plug (T2S Socket Optional)			
Safety Compliance	IEC 61851-1, IEC 61851-21-2			
Multiple Protection	UVP, OVP, RCD (DC 6mA), SPD, Ground Fault Protection OCP, OTP, Control Pilot Fault Protection			
Environmental				
Operating Temperature	-30°C to 50°C			
Indoor / Outdoor	IK08 & IP54			
Relative Humidity	Up to 95% Non-condensing			
Cable Length	5m Charging Cable, 7m optional with Surcharge			
Dimensions & Weights (Cable / Socket)				
Product Dimensions	361.5 x 250 x 100mm / 361.5 x 250 x 163mm			
Package Dimensions	497 x 348 x 242mm / 455 x 324 x 225mm			
Net Weight	4.6kg / 3.2kg	4.4kg / 3.4kg	5.7kg / 3.4kg	
Gross Weight	5.5kg / 4.2kg	5.3kg / 4.4kg	6.6kg / 4.4kg	
Pedestal				
	JNT-SP	JNT-BBP	JNT-BBPC	JNT-SSPC
Dimensions	270x155x1395mm	270x155x1395mm	400x200x1987.5mm	710x220x1987.5mm
Net Weight	13kg	13kg	44kg	53.5kg
Gross Weight	17kg	17kg	51.3kg	63.3kg
Product Material	Powder Coated Steel			